



概要



EB180電気ドロップボルトは非常に軽量です。25mm幅のフェイスプレートは、事実上のドアと枠のあらゆるタイプに取付出来るように設計されています。長方形の(EB185)角が円弧状の(EB180)フェイスプレートは、さまざまなニーズを満たすために設計されています。

仕様

- フェールセーフ (通電で施錠)
- 動作電圧: 12/24VDC
- 許容電圧値: ±10%
- 使用電流: 起動時: 0.9A/12VDC; 0.4A/24VDC
施錠時: 0.15A/12VDC; 0.1A/24VDC (20度)


- 磁気ボルトステータス出力:
(SPDT定格3A/12VAC、1.5A/250VAC)
- 動作温度: -10~+45℃湿度: 0~95% (結露しないこと)。再施錠時間遅延: 50万
- 回サイクルにわたって試験1、3、6、9秒。フェイスプレート材質: ステンレス
- スチール正味重量: 0.6キロ

Dimensions

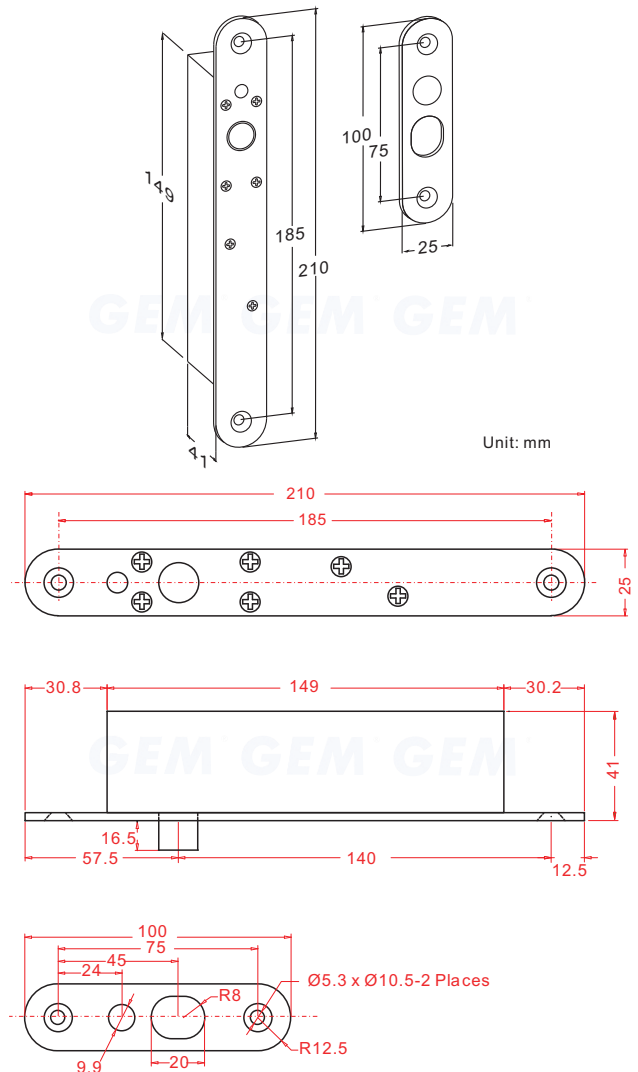

ダブル・アクション・ドア

EB180電気ドロップボルトは、特別にダブル・スイング・ドアに使用するために設計されています。それはまた、外スウィングと内スウィングドアの両方に取り付けることができます。

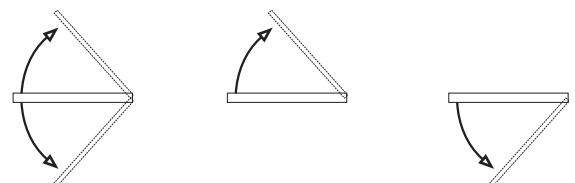

Double swing doors

Outswing doors

Inswing doors


GOLDMAN, INC. ゴールドマン株式会社

● ロングライフ・ソレノイド

特別に設計されたソレノイドは、強度と長寿命を目指しています。ソレノイドは、操作回数50万回を保証されています。

● Energy Saving Design

After the dropbolt is completely locked, the current draw changes from 0.9A to 0.15A to prolong its life.

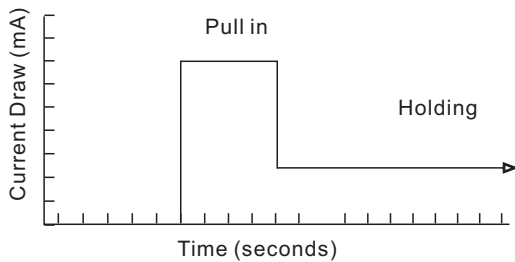

● Horizontal or vertical installation

GEM's electric dropbolts can be installed either horizontally at the top or bottom of the door frame or vertically on the side of the door frame.

Fig. A Horizontal Installation (Frame Header)








Fig. B Vertical Installation (Side Jamb)




● 自動探偵回路

ユニークな自己探偵ロジック回路は、ドアが正しく完全に閉じる迄ボルトが出ないように設計されています。

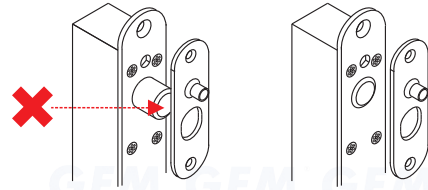

● Vandal Resistant Circuitry

Once the bolt is completely locked, the reed sensor automatically disconnects from the bolt to avoid unauthorized access attempts.

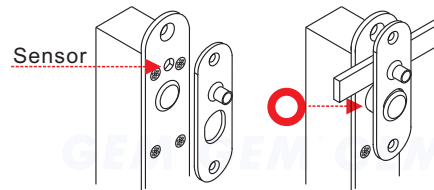

● Relock Time Delay

Adjustable Time Delay of 1,3,6,9 seconds with 2 way DIP switch. (Default Value: 1 sec.)

Relock time setting

ON <input type="checkbox"/> 1 <input type="checkbox"/> 2	ON <input type="checkbox"/> 1 <input type="checkbox"/> 2	ON <input type="checkbox"/> 1 <input type="checkbox"/> 2	ON <input type="checkbox"/> 1 <input type="checkbox"/> 2
↑	↑	↑	↑
1 second	3 seconds	6 seconds	9 seconds

● Warranty

The product is warranted against defects in material and workmanship while used in normal service for a period of 2 years from the date of sale to the original customer. The GEM policy is one of continual development and improvement; therefore GEM reserves the right to change specifications without notice.

GIANNI INDUSTRIES, INC.